

VEXO X-POT XP+ Specification Sheet

Product Code

NA-XPOTXP+

Product Description

X-POT XP+ Side Stream Filtration and Dosing Unit C/w Franklin 10VR-02 Multi-stage Pump



Functional Overview

- **Integrated Filtration System:** Combines magnetic filtration, bag filtration, air and dirt separation and chemical dosing into one simple to install unit.
- **BMS Integration:** 1-Amp common relay for alarm notification of blocked filter status and maintenance requirement.
- **Smart Pump Control:** The Franklin 10VR-02 Multi-stage pump is controlled by the VEGAMET 842 controller which monitors pressure differential to indicate filter status and maintenance needs.
- **Construction:** 316 stainless steel vessel with a rigid powder coated welded steel frame for durability and ease of installation

Benefit Summary


Category	Benefit
Energy Efficiency	<ul style="list-style-type: none"> - Restores system efficiency by up to 96% under optimal flow conditions. - Reduces energy consumption by up to 3.5% in real-world settings.
Corrosion Control	<ul style="list-style-type: none"> - Removes corrosion by-products such as magnetite sludge and corrosion induced gases.
Gaseous Oxygen Removal	<ul style="list-style-type: none"> - Removes gaseous micro-bubbles of air and trapped air using automatic vent and micro-bubble coalescence.
System Longevity	<ul style="list-style-type: none"> - Mitigates erosion, air entrapment, and sludge build-up, reducing mechanical wear.
Diagnostics	<ul style="list-style-type: none"> - Enables early fault detection via filter change alerts - indicating system chemistry imbalances.
Water Quality Management	<ul style="list-style-type: none"> - Supports consistent water quality aligned with BSRIA BG29 and BG50 and best practice standards.
Integrated Functionality	<ul style="list-style-type: none"> - Combines magnetic and bag filtration, air separation, and chemical dosing in a single unit.
Operational Flexibility	<ul style="list-style-type: none"> - Performs effectively in pressurized, closed-loop systems at varying flow rates.

VE XO X-POT XP+ Specification Sheet

Product / Model	X-POT Series/XP+	Art. Code	
Description	Side Stream Filtration and Dosing Unit	Date	
Customer			
Project			
Reference			

Design Criteria

- Medium:** Water/Glycol (Max 50%)
- Max. System Volume:** 79,885 US Gal
- Max. Pressure:** 232 PSI
- Min. Flow Rate:** 1.31 Gal/M
- Max. Flow Rate:** 55.47 Gal/M
- Max. Temp:** 32°F - 203°F (0°C - 95°C)
- Filtration Rate:** Filtration down to 1 Micron (Bag Filter)
- ΔP - Pressure Drop:** See below graph

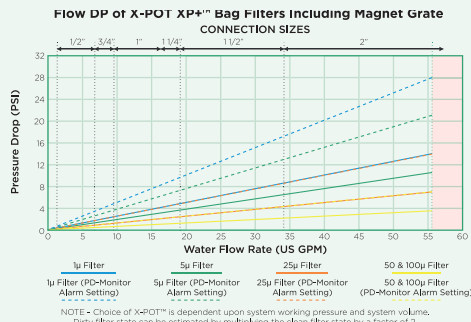

- Mounting:** Floor Standing (Frame/Skid)
- Dosing Capacity:** 6.6 US Gal


Testing and Quality Assurance

- Design Standard/Codes:** ASME BPVC VIII Div.1
ASME 'U' Stamp
BSRIA BG29 & BG50
- Test Pressure:** 360 PSI
- Test Medium:** Hydrostatic
- Test Certificate:** Yes
- Drawing:** Revit Drawing
- Notified Body Inspection:** Yes
- Warranty (Unit Assembly):** 2 Years
- Warranty (Vessel Body):** 10 Years
- Industry Peer Reviewed Energy Savings:** Yes

Construction Materials

- Vessel Body/Lid:** SS 316
- Baffle Plate:** SS 316
- Magnet Grate:** SS 316
- Magnets (13no.):** Neodymium Rare Earth (Encased in SS 304)
- Bag Filter:** Polypropylene Needlefelt
- Isolation Valves:** SS 316
- AAV:** SS 316
- NRV:** SS 316
- Fittings:** SS 316

Drawing

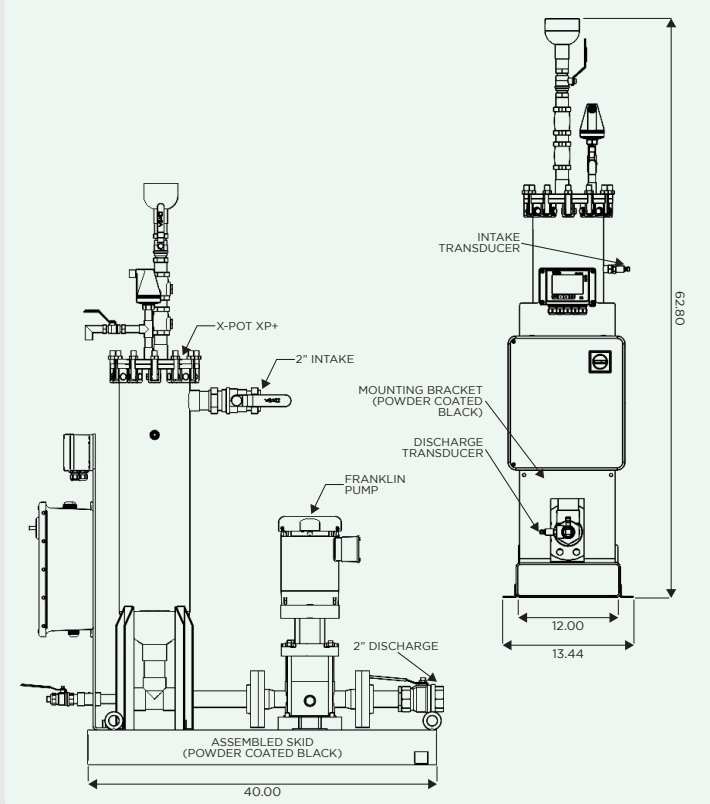

Electrical & Communication Specifications

- Electrical Supply:** 230V / 60Hz / 1 Phase
- BMS Connectivity:** 1-Amp Common Relay Alarm

Dimensions

- Overall Height:** 62.80"
- Overall Depth:** 13.44"
- Overall Width:** 40.00"

Connections

- Isolation Valve:** 2" NPTF
- AAV:** 1/2" NPTF

Volume & Weight

- Volume:** 6.38 US Gal
- Dry Weight:** 167.56 Pounds
- Operational Weight:** 266.69 Pounds

VEXO X-POT XP+ Specification Sheet

General Description

A - The VEXO™ X-POT XP+™ assists in the restoration of water quality and flow rates within Hydronic Heating and Cooling Systems to remain reliable and run at their intended design capabilities, by keeping the thermal fluid within the system filtered, clean, and free from suspended particulates and micro-bubbles. This also allows Chemical Inhibitor's and Biocides to remain effective, thus reducing the accumulation of Corrosion, Scale and Bio-film deposits which would otherwise cause flow loss, degradation of plant and pipeline material, as well as reduced system reliability, increased running and reactive maintenance costs, water losses and reduced lifespan of system components, X-POT has valid peer reviewed white papers - detailing potential energy savings.

This is achieved by a combination of functions, as the X-POT™ acts as an all-in-one:

- Dirt & Air Separator
- Magnetic Filter
- Side Stream Filter (down to 1 micron)
- Shot Feeder (For adding Water Treatment Chemicals)

B - This section specifies cleaning and treatment of circulating HVAC water systems, including the following:

- I. Closed Loop Cooling Systems
- II. Closed Loop Heating Systems

Product Description - Side Stream Water Filtration and Treatment Device

A - The Contractor shall furnish and install a full side stream filtration device that incorporates an industry peer reviewed 'all-in-one', shot feeder, magnetic filter and air and dirt separation device as shown and detailed on the contract documents. The product provided shall be the VEXO™ X-POT XP+™ manufactured by VEXO International (www.vexooint.com) and exclusively supplied by Skidmore of Benton Harbor, MI or an approved substitution.

B - The product shall be all stainless steel construction including all valves and fittings and Franklin 10VR-02 Multi-Stage Circuiting Pump. Maximum working pressure shall be 232psi with flow rates up to 55.5 GPM with a temperature range of 32°F to 200°F. Dosing capacity shall be a minimum of 6.6 Gallons and Bag Filtration range to be no less than 50µ to 1µ (Cartridge Filters are not acceptable). Magnetic filtration shall consist of no less than thirteen (13) rare earth magnets - eight (8) with a minimum of 26.5 lbs pull force each, and five (5) with a minimum of 35 lbs pull force each - designed for easy removal and cleaning. Air separation efficiency to be 100% removal to micro-bubble level and incorporate an automatic air vent. Total system volume capacity shall be no less than 79,885 Gallons. The product must be provided with 2" isolation and drain valves and have an option for an insulation jacket with filter PD condition alarm installed to notify of timely filter changes and alert to water quality.



WARNING!

Do not open whilst fluid is hot and/or under pressure!

Please use safety goggles, gloves and N95 face mask when working on this vessel/magnetic field.

